


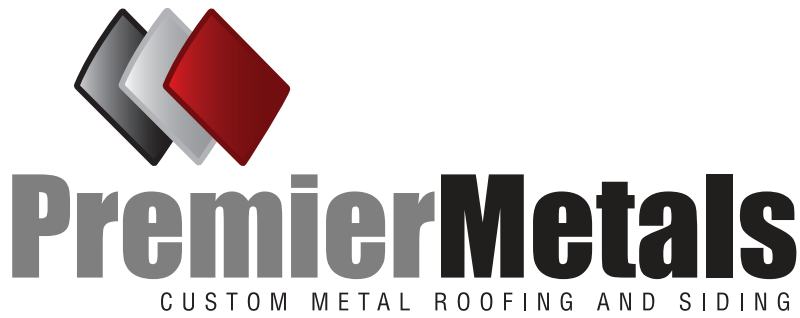

sales@premiermetals.com • www.premiermetals.com

1685 State Route 39, Sugarcreek, OH 44681
ph 330-852-1310 • fax 330-852-1400

802 Wooster Road, Loudonville, OH 44842
ph 419-920-9090 • fax 419-920-9150

16156 Madison Road, Middlefield, OH 44062
ph 440-632-8999 • fax 440-632-8998

PREMIER LOC PANEL TECHNICAL DATA

APPLICATIONS

Snap Seamed roof panel used on slopes down to 3/12p. Standard panel lengths up to 45'. Please inquire for longer lengths.

SUBSTRATES

Plywood or Rigid Insulation/Metal Deck

MATERIAL

Standard: 24 ga. ASTM A792 (50 ksi steel)
AZ55 - Bare, AZ50 - Painted

MANUFACTURING

Roll formed in factory.

FINISHES

Acrylic Coated Galvalume®

Fluoropolymer (Kynar 500® PVDF resin-based)

PAN CONDITIONS

16" - 24 ga.

*Oil canning is inherent in all metal panels and is not cause for panel rejection.

NOTE

All data represented on this sheet may not be applicable to all widths and gauges. Please contact Premier Metals for more information.

PREMIER
LOC
PROFILE

